

Extentions

Extentions

Deze instructie beschrijft het menu Accounts > Extentions.

Extentions zijn toestelaansluitingen, waar een device ofwel toestel zich mee kan aanmelden.

Extentions (35)

Use this to configure your SIP extensions.

SHOW ALL

EXPORT

SEARCH

<input type="checkbox"/>	Extension	Call Group	Context	Enabled	Description	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	200		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	301		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	302		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	303		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	304		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	305		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	306		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	307		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	308		192.168.100.11	True		<input type="checkbox"/>	<input type="checkbox"/>

Basic Settings

- Extension
Enter the alphanumeric extension. The default configuration allows 2 - 7 digit extensions.
- Number Alias
If the extension is numeric then number alias is optional. The primary purpose of this field is when the extension is not a number then the number alias is required. Note a numeric extension and number alias does not currently work.
- Range
Enter the number of extensions to create. Increments each extension by 1.
- Voicemail Password
Enter the numeric voicemail password here.
- Account Code
Used with billing systems if you don't have a billing system then its optional.
- Effective caller ID Name
Internal Caller ID name
- Effective Caller ID Number
Internal caller ID number usually set to the extension number.
- Outbound Caller ID Name
Used by the outbound route for external caller ID name. Business or Organization typically is set here.
- Outbound Caller ID Number
Used by the outbound route for external caller ID number here. Business or Organization number goes here.

Extensions

- Emergency Caller ID Name
This is used when calling out to an emergency service like 911.
- Emergency Caller ID Number
This is used when calling out to an emergency service like 911.
- Directory Full Name
The first and last name used in the directory. You can call that directory with [*411](#)
- Directory Visible
Select whether to hide the name from the directory.
- Directory Extension Visible
Select whether announce the extension when calling the directory.
- Limit Max
Set max number of outgoing calls for this user.
- Limit Destination
Set the destination to send the calls when the max number of outgoing calls has been reached.
- Voicemail Enabled
Enable or disable voicemail for this extension.
- Voicemail Mail To
The email address for sending voicemail to email.
- Voicemail File
Select whether to send the voicemail as an attachment or as a link in the email.
- Voicemail Keep Local
Choose whether to keep the voicemail in the system after sending the email notification.
- Missed Call
Set the missed call to true and set the email address if you want to receive an email for missed calls that were routed through the dialplan to and was not answered by the extension.
- Toll Allow
Enter the toll allow value here. (Examples: domestic,international,local) This can be set to any name you want it sets a variable that can be a condition on the outbound routes.
- Call Timeout
Set the timeout for the call ringing.
- Call Group
You can define any call group you want the following groups are examples: sales, support, billing. These are used for group intercept or calls can be sent to the call group.
- Call Screen
If set will ask the caller to identify themselves. Their response will be recorded and offered to the person receiving the call.
- Record


Extensions

Whether to record local, inbound, outbound, or all calls that were sent directly to this extension.

- Hold Music
Select music or ring tones that will be used for music on hold for this extension.
- Context
The context is set by default to match the domain name or IP address. It is usually correct by default and doesn't need to be changed in most cases.
- Enabled
Extension enabled or disabled.
- Description
A description for the extension.

Advanced Settings

Deze instellingen alleen aanpassen als je zeker weet wat je doet.

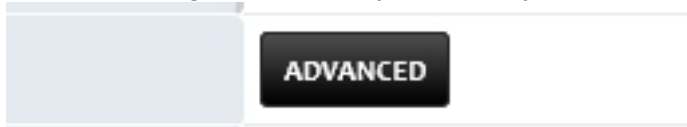

- Auth ACL
Advanced auth acl uses.
- CIDR
Advanced cidr uses.
- SIP Force Contact
Choose whether to rewrite the contact port, or rewrite both the contact IP and port.
- SIP Force Expires
To prevent stale registrations SIP Force expires can override the client expire.
- MWI Account
MWI Account with [user@domain](#) of the voicemail to monitor.
- SIP Bypass Media
Choose whether to send the media stream point to point or in transparent proxy mode.
- Absolute Codec String
Absolute Codec String for the extension.
- Force ping
Use OPTIONS to detect if extension is reachable.
- Domain
The domain the extension is currently saved on.
- Dial String
Location of the endpoint.

Extensions

Unieke FAQ ID: #3984

Auteur:

Laatst bijgewerkt: 2022-10-05 13:00